


AMO COMPOUND BOW STRING LENGTH STANDARD

Compound bowstring length shall be designated by its stretched length as determined by placing the string loops over 1/4" diameter steel pins and stretching with 100 lbs. of tension. Measurement is taken from outside of pin to outside of pin. Tolerance is +/- 1/4" after 20 seconds under tension load.

NOTE:
0.1 TWIST RATE IS 4 TO 6 TWISTS PER 6" OF BOWSTRING LENGTH
0.2 SERVING LENGTHS ARE +/- .100"

| REVISIONS | | | | |
|-----------|------|--|------------|----------|
| ZONE | REV. | DESCRIPTION | DATE | APPROVED |
| | A | RELEASED FOR SAMPLES | 09-07-2010 | MWD |
| | B | PULSE STRING LENGTH WAS 58-3/8 - NOW 58-7/16 | 09-14-2010 | MWD |
| | C | CHANGED DIMENSION "A" ON PULSE | 09-22-2010 | MWD |
| | D | DIMENSION CHANGED ON HUNTER NOW 38-1/2 / WAS 36-1/2 | 09-22-2010 | MWD |
| | E | PURE DIMENSION CHANGES ON "G", "D" AND "C" | 09-26-2010 | MWD |
| | F | REMOVED COLUMN "B" | 09-28-2010 | MWD |
| | G | ADDED TOUR, TOUR W/ESX AND HUNTER WITH TOUR | 12-07-2010 | MWD |

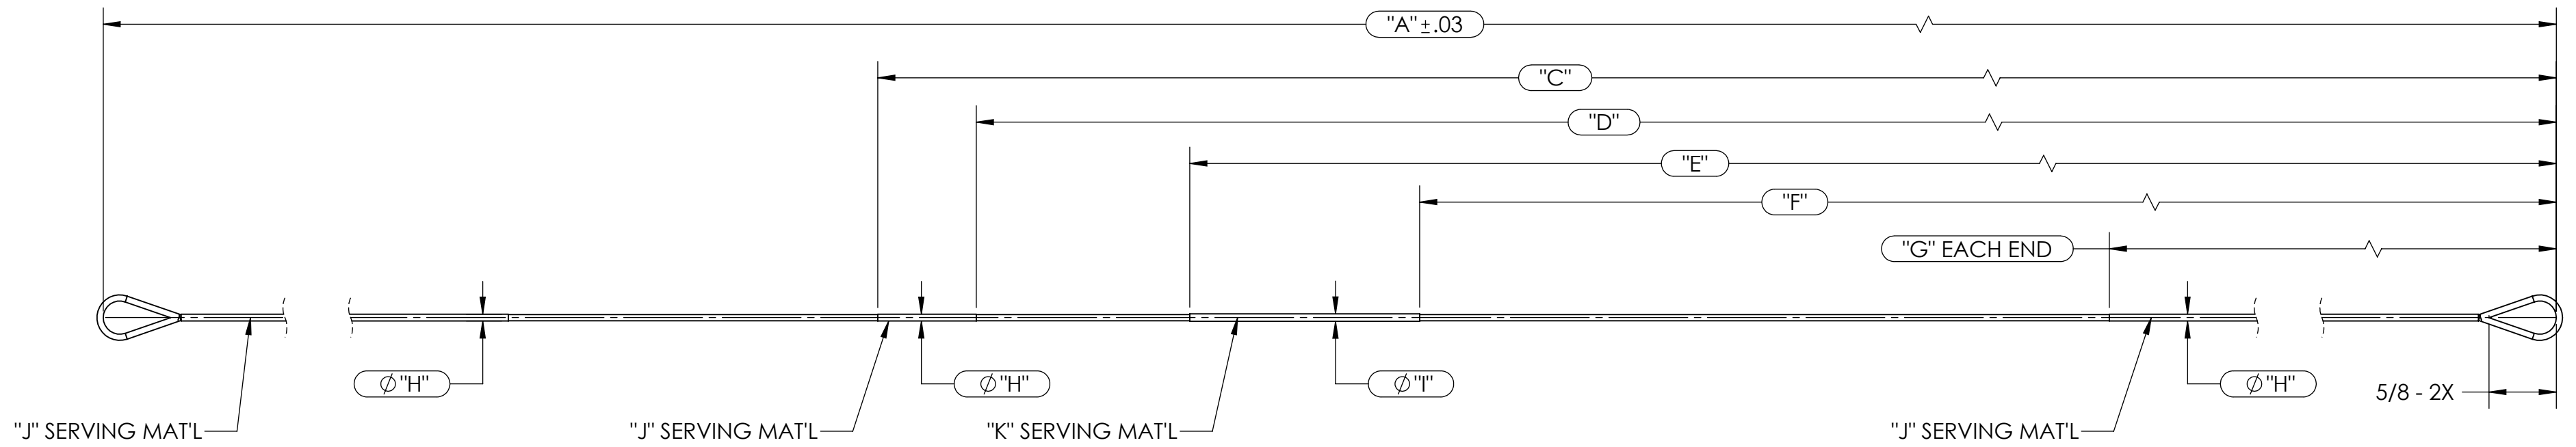

| PART NUMBER | BOWMODEL | STRING LENGTH | STRING MATERIAL | NUMBER OF STRIANDS | "A" | "C" | "D" | "E" | "F" | "G" | "H" | "I" | "J" | "K" |
|-------------|-----------------|---------------|------------------|--------------------|----------|---------|---------|---------|---------|---------|------------|------------|-----------|------------|
| 10161- | 2011 PULSE | 58-7/16" | BCY 452X LOW WAX | 24 | 58-7/16" | 35-3/4" | 34-1/4" | 30-1/5" | 27" | 17" | .100/.104" | .108/.112" | .014 HALO | 62 XS .021 |
| 10162- | 2011 PURE | 60-3/8" | BCY 452X LOW WAX | 24 | 60-3/8" | 36-3/4" | 35-1/4" | 31-1/2" | 28" | 17" | .100/.104" | .108/.112" | .014 HALO | 62 XS .021 |
| 10163- | 2011 HUNTER | 54-1/2" | BCY 452X LOW WAX | 24 | 54-1/2" | 33-3/4" | 32-1/4" | 28-1/2" | 25" | 16" | .100/.104" | .108/.112" | .014 HALO | 62 XS .021 |
| 10164- | 2011 TOUR | 58-5/8" | BCY 452X LOW WAX | 24 | 58-5/8" | 35-1/2" | 34" | 30-1/2" | 27" | 15-1/4" | .100/.104" | .108/.112" | .014 HALO | 62 XS .021 |
| 10171- | 2011 TOUR W/ESX | 60-5/8" | BCY 452X LOW WAX | 24 | 60-5/8" | 36-3/8" | 34-7/8" | 31-5/8" | 28-1/8" | 16" | .100/.104" | .108/.112" | .014 HALO | 62 XS .021 |
| 10173- | HUNTER W/ TOUR | 52-5/8" | BCY 452X LOW WAX | 24 | 52-5/8" | 32-5/8" | 31-1/8" | 28-1/8" | 24-5/8" | 15-1/4" | .100/.104" | .108/.112" | .014 HALO | 62 XS .021 |

COLOR CHART

PART NO.-01
Camo Bows (AP, MAX1 and AT Editions)

- 452X Tan
- 452X Camo
- Tan Halo Serving
- Black 62XS Center Serving

PART NO.-02

- Ninja Bows
- 452X Black
 - 452X White & Black
 - Silver Halo Serving
 - Black 62XS Center Serving

PART NO.-03

AP Snow Bows (APS and AT Edition Snow)

- 452X Tan
- 452X White & Black
- Silver Halo Serving
- Black 62XS Center Serving

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <INSERT COMPANY NAME HERE>. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <INSERT COMPANY NAME HERE> IS PROHIBITED.

| | | | |
|-----------------------------|----------------------|-----------|--------------|
| UNLESS OTHERWISE SPECIFIED: | | NAME | DATE |
| DIMENSIONS ARE IN INCHES | | DRAWN | MWD 08-20-10 |
| TOLERANCES: | | CHECKED | |
| FRACTIONAL ±.030 | | ENG APPR. | |
| ANGULAR: MAX CH ±3 DEGREES | | MFG APPR. | |
| TWO PLACE DECIMAL ±.010 | | Q.A. | |
| THREE PLACE DECIMAL ±.005 | | COMMENTS: | |
| NEXT ASSY | USED ON | FINISH | |
| APPLICATION | DO NOT SCALE DRAWING | | |

Elite Archery
235 Middle Road
Henrietta, NY 14467

TITLE: 2011 STRING CHART

| | | |
|----------|-----------|----------|
| SIZE | PART NO. | REV |
| C | SEE CHART | G |

SCALE: 1:8 SHEET 1 OF 1